


DATASHEET

Thermal Protector SH6

Type series H6

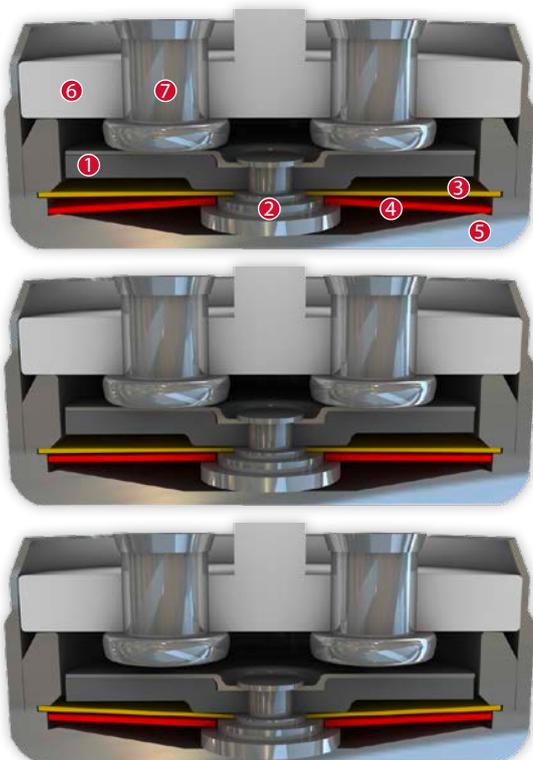

Construction and function

Switchgear consisting of a mobile and circular contact bridge (1), a contact bearing pin (2), a spring snap-in disc (3) and a bimetallic disc (4) which is riveted into one another, undetachable and fixed in a positive lock and self-aligning between a non-conductive floor of a housing (5) and an insulating ceramic bearing (6) with two integrated stationary contacts (7). At the same time, the switchgear is supported by the spring snap-in disc (3) with the contact bridge (1) acting as a transfer element for electric current which is held between a supporting collar and a circumferential ring. As such, the bimetallic disc (4) underlying it, that is also stuck out from the contact bearing pin (2), can continuously work (exposed) by mechanical loads without the contact pressure defined by the spring snap-in disc (3) diminishing. As soon as the bimetallic disc (4) reaches its rated switching temperature, it effectively springs against the throw force of the spring snap-in disc (3) into its inverted position. The contacts are abruptly opened. The temperature will now fall. The bimetallic disc (4) will only snap back upon reaching a defined spring back temperature and the contacts are abruptly closed again. As a result of the dimensioning of the contact bearing pin (2), an easy, circular rotation of the circle-shaped contact bridge is enabled with every switch so that transfer resistances remain constantly below the minimum limit after many switch cycles and the long term stability is sustained even under high levels of stress.




Features:

High performance	maximal switching current 42 A AC / 60 A DC
Quick response sensitivity	featured by small protector mass and the brass-housing
Excellent long term performance	due to instantaneous switching, fine-silver contacts, constant contact resistance and to electrically as well as mechanically unstressed bimetallic disc, reproducible switching temperature values
Very short bouncing times	< 1 ms
Instantaneous switching	with always constant contact pressure up to the nominal switching point, resulting in low contact stress
Temperature resistance	by use of high temperature resistant materials and components

Technical Data Type SH6

The listed products are an extract from our standard range. Other versions and customised manufacturing are available upon request.

SH6

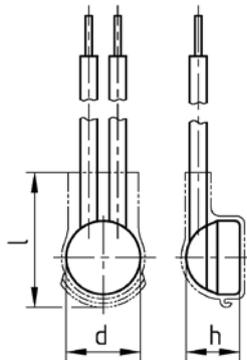

Installation height h	from 7,0 mm
Diameter d	10,7 mm
Length of the insulation cap l	17,5 mm

Type: Normally closed; resets automatically; with connector cables; with epoxy; insulation: Mylar®-Nomex®

Nominal switching temperature (NST) in 5 °C increments	70 °C - 200 °C	
Tolerance NST ≤ 140 °C	±5 K	
Tolerance NST > 140 °C	±10 K	
Reverse Switch Temperature (defined RST is possible at the customer's request)	UL	≥ 35° C (≤ 130° C NST) -85 K ± 15 K (≥ 135° C ≤ 190° C NST) -90 K ± 15 K (≥ 195° C ≤ 200° C NST)
	VDE	≥ 35 °C
Installation height	from 7,0 mm	
Diameter	10,7 mm	
Length of the insulation cap	17,5 mm	
Resistance to impregnation *	suitable	
Suitable for installation in protection class	I + II	
Pressure resistance to the switch housing *	600 N	
Standard connection	Lead wire 1,0 mm ² / AWG18	
Available approvals (please state)	IEC; VDE; UL; CQC; CMJ; ENEC	
Operating voltage range AC/DC	up until 500 V AC/ 28 V DC	
Rated voltage AC	250 V (VDE) 277 V (UL)	
Rated current AC cos φ = 1.0/cycles	13,5 A / 10.000	
Rated current AC cos φ = 0.6/cycles	9,0 A / 10.000	
Rated current AC cos φ = 1.0/cycles	35,0 A* / 2.000 42,0 A / 300	
Rated voltage DC	24 V (VDE, UL)	
Max. switching current DC/cycles	60,0 A / 3.000	
High voltage resistance	2,0 kV	
Total bounce time	< 1 ms	
Contact resistance (according to MIL-STD. R5757)	≤ 50 mΩ	
Vibration resistance at 10 ... 60 Hz	100 m/s ²	

Current sensitivity characteristic at I_{nom}:

dependent of...

- Thermal coupling
- Application area
- Built-in conditions
- Outer influences
- Wiring length / wiring diameter



Ordering example:

SH6 - 130.05 0100 / 0100

Type / version _____

NST [°C] _____

Tolerance [K] _____

Lead lengths [mm] _____ L₁ L₂

Marking example:

 thermik

Trade mark _____

Type / version _____ SH6

NST [°C] . Tolerance [K] — 130.05

More varieties of the type series H6:

• CH6 – with connector cables; with epoxy; without insulation

www.thermik.de/en/data/CH6